


LINEAR GRAZER SERIES

LINEAR GRAZER

IK 05

MODEL CODE EL - B6JD3634

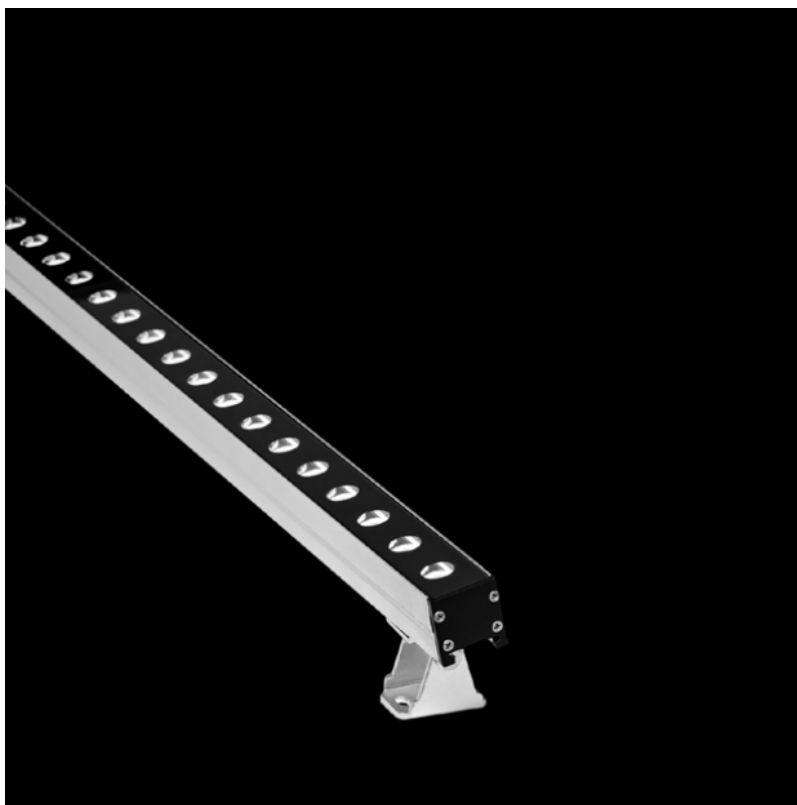

36× 0.7 W

LIGHT SOURCE



1976 lm

LUMINANCE



IK 05

IMPACT



30°

BEAM ANGLE



-20~40°C

OPERATING

02 — SPECIFICATIONS

Technical specifications.

HOUSING	Extruded aluminium, anodized finishing.
LIGHT WINDOW	Tempered glass, T=3mm — glass and housing are silicone sealed.
LENS	OPTICS lens, efficiency ≥85%; 30° beam angle (B38).
LED TYPE / DRIVER	36× 0.7W SMD; built-in multi-voltage constant-current driver.
POWER CABLE	H07RN-F 2×1.5mm ² , L=1.2m (24V) · H05RN-F 3×1.0mm ² , L=0.5m (120/240V) — outside luminaire.
DIMMING	Triac, PWM, 1–10V, DALI (24V).
OPERATING TEMP.	-20°C ~ 40°C.
BRACKET	Aluminium, anodized finishing.

ORDERING KEY

B6JD

Series — Linear Grazer wall washer

3634

Configuration — 36×0.7W single-face engine

MODEL — EL-B6JD3634

Dimensions	L=1000mm	Input voltage	DC24 / AC120 / AC240
Current	1220 / 255 / 135 mA	Consumption	29 / 30.8 / 31.5 W
IK rating	05		

MOUNTING & INSTALLATION

01

Mark & drill

Position the end brackets; drill and plug fixing points.

02

Fix the plate

Secure brackets to wall, façade, or ground recess.

03

Connect & seal

Wire the supply through the gasketed gland.

04

Adjust & lock

Set beam tilt, seat the bar in the brackets, and lock.

TRIAC

PWM

1-10V

DALI

IK 05

RoHS

CE