


100×100 · RECESSED

STEP LIGHT

IK 10

MODEL CODE EL - D1HA1034

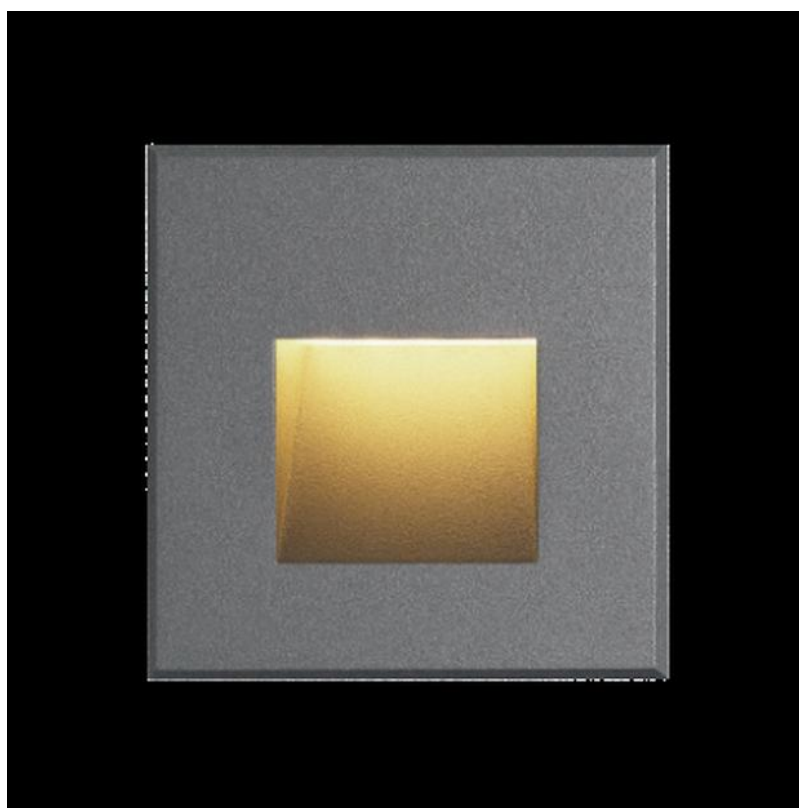

10×0.5 W

LIGHT SOURCE



112.9 lm

LUMINANCE



IK 10

IMPACT



IP67

SEALING



-20~40°C

OPERATING

02 — SPECIFICATIONS

Technical specifications

HOUSING	12# die-cast aluminium, RAL9005 powder coated, T=60–80µm; ISO class 1 / ASTM 4B adhesion.
FRONT COVER	12# die-cast aluminium, RAL9005 powder coated (same as housing).
LIGHT WINDOW	UV-stop & flame-resistant PC.
LED TYPE / DRIVER	10×0.5W SMD; built-in on/off driver.
SEALING	IP67 cable gland; waterproof silicone gasket.
OPERATING TEMP.	-20°C ~ 40°C.
POWER CABLE	H05RN-F 2×1.0mm², L=0.5m (24V) · H05RN-F 3×1.0mm², L=0.5m (120/240V) — outside luminaire, without water-stopper.

ORDERING KEY

D1HA

Series — Step light

1034

Configuration — 10×0.5W

MODEL — EL-D1HA1034

Dimensions	L100×W100×H85.5mm	Input voltage	DC24 / AC120 / AC240
Current	230 / 100 / 60 mA	Consumption	5.5 / 6.8 / 6.5 W
IK rating	10		

MOUNTING & INSTALLATION

01 Mark & cut

Mark the recess outline on the wall or stair riser; cut the opening.

02 Fit sleeve

Insert the PC/ABS 092# recessed sleeve into the opening.

03 Connect & seal

Wire the supply through the cable gland.

04 Fix cover

Secure the front cover flush to the wall surface.

TRIAC

0–10V

DALI (EXT.)

RECESSED

IK 10

RoHS

CE