


72×75 · RECESSED

STEP LIGHT

IK 10

MODEL CODE EL - D1GA0334

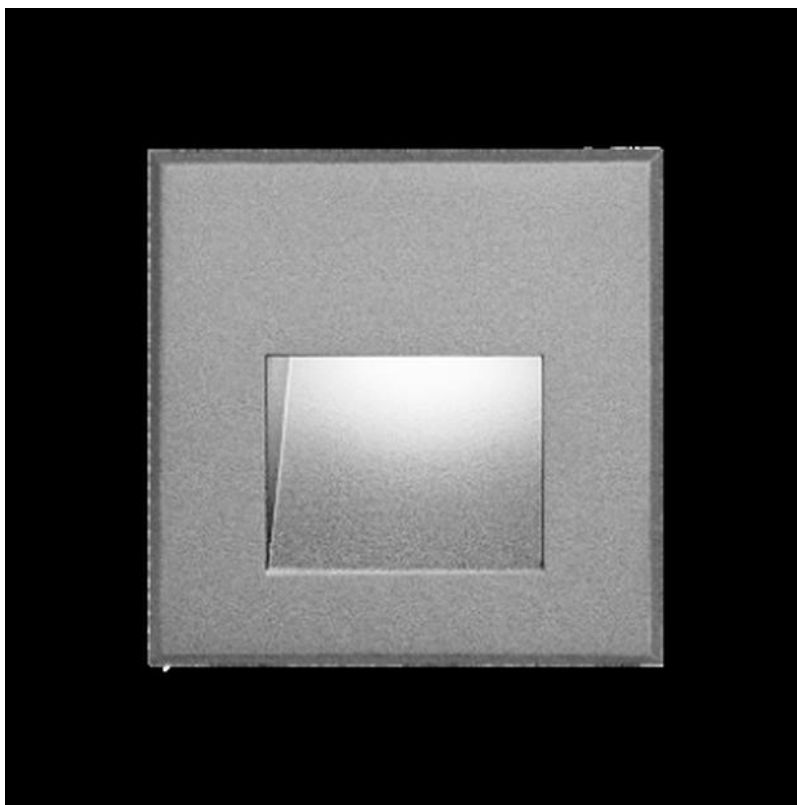

3×0.7 W

LIGHT SOURCE



36 lm

LUMINANCE



IK 10

IMPACT



IP67

SEALING



-20~40°C

OPERATING

02 — SPECIFICATIONS

Technical specifications

HOUSING	12# die-cast aluminium, RAL9005 powder coated, T=60–80µm; ISO class 1 / ASTM 4B adhesion.
FRONT COVER	12# die-cast aluminium, RAL9005 powder coated (same as housing).
LIGHT WINDOW	UV-stop & flame-resistant PC.
LED TYPE / DRIVER	3×0.7W SMD; built-in on/off driver.
SEALING	IP67 cable gland; waterproof silicone gasket.
OPERATING TEMP.	-20°C ~ 40°C.
POWER CABLE	H05RN-F 2×1.0mm², L=0.5m (24V) · H05RN-F 3×1.0mm², L=0.5m (120/240V) — outside luminaire, without water-stopper.

ORDERING KEY

D1GA Series — Step light	0334 Configuration — 3×0.7W
--	---

MODEL — EL-D1GA0334

Dimensions	L72×W75×H47.5mm	Input voltage	DC24 / AC120 / AC240
Current	110 / 48 / 29 mA	Consumption	2.6 / 3.1 / 3.1 W
IK rating	10		

MOUNTING & INSTALLATION

01 Mark & cut Mark the recess outline on the wall or stair riser; cut the opening.	02 Fit sleeve Insert the stainless steel 178# recessed sleeve into the opening.
03 Connect & seal Wire the supply through the cable gland.	04 Fix cover Secure the front cover flush to the wall surface.

TRIAC	0–10V	DALI (EXT.)	RECESSED	IK 10	RoHS	CE
-------	-------	-------------	----------	-------	------	----