


SPIKE LIGHT SERIES

SPIKE

IP-66

MODEL CODE EL - B3ADX0127

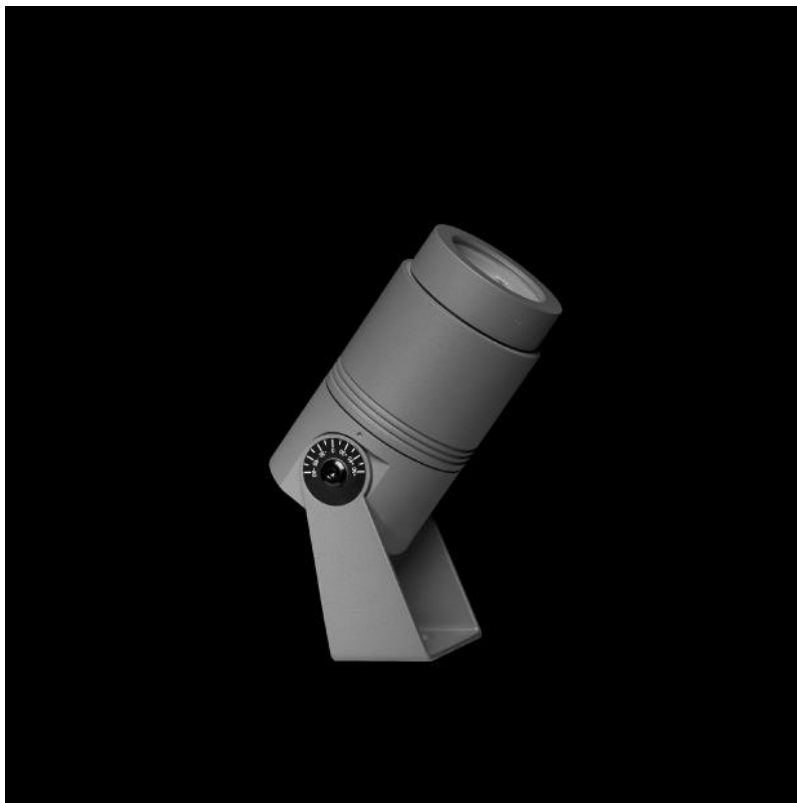

1x8 W

LIGHT SOURCE



968 lm

LUMINANCE



IK 03

IMPACT



IP-66

SEALING



-20~40°C

OPERATING

02 — SPECIFICATIONS

Technical specifications

HOUSING	12# Die-casting aluminum finishing or powder painting T=60–80µm. Adhesion of ISO class 1 / ASTM class 4B
LENS	OPTICS lens, efficiency ≥85%
LED TYPE	NICHIA
LIGHT WINDOW	Tempered glass. T=3mm
CABLE GLAND	Nickel coated copper
GASKET	Tooling shaped seal
PCB	Excellent heat conductivity aluminum, coefficient of heat conductivity ≥2.0 W/mK
LED DRIVER	Constant Voltage Input, Constant Current Output
OPERATING TEMP.	-20°C ~ 40°C
POWER CABLE	Outside of luminaire 12V/24V: H05RN-F 2×1.0mm², L=2.0m 120V/240V: H05RN-F 3×1.0mm², L=2.0m
DIMMING SUPPORT	Triac / PWM Available 1–10V / DALI Customized

ORDERING KEY

B3ADX

Garden Spotlight

0127

1×8W

MODEL — EL-B3ADX0127

Dimensions	Ø60 / H98 mm	Input voltage	DC24V / AC120V / 240V
Current	24V=437 mA 120V=92 mA 240V=49 mA	Consumption	24V=10.4 W 120V=11 W 240V=10.5 W
IK rating	03		

MOUNTING & ACCESSORIES

- 01 Spike

Optional spike mounting.
- 02 Surface Base

Round surface mounting base.
- 03 Hood

Stainless-steel hood option.
- 04 Water-Stopper

IP-66 water-stop solution.

- TRIAC
- PWM
- 1-10V
- DALI
- IP-66
- RoHS
- CE